


BEL LIGHTING | Lena Pro-M-A

Item code: **7025A.30910.32D**


IK07

IP66

Class
III



Accessories (see more details next pages)
Accessoires (voir plus de détails pages suivantes)
Accessoires (zie meer details volgende pagina's)
Zubehör (mehr Details auf den folgenden Seiten)

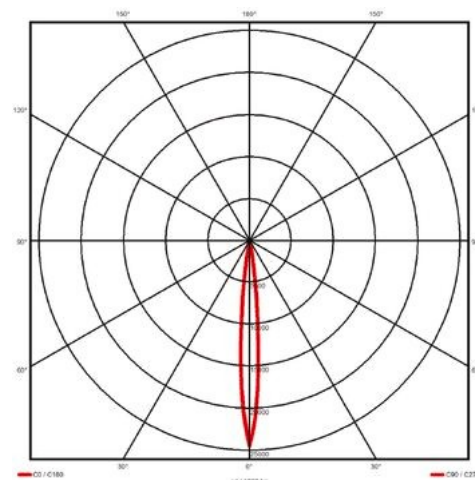

Product Description

Small waterproof IP66 led projector allowing the enhancement of the exterior parts of buildings to create atmospheres or illuminate an alley. This very robust luminaire is manufactured by machining process. Very good light output and anti-glare cap are the main features of the LENA PRO series which combines high efficiency and long life thus emphasizing the quality of light. It is an ideal solution for many outdoor lighting installations, both in the private and public domain.

General technical data

Manufacturing material :	<i>Body made in anodized aluminum</i>
Surface finishing* :	<i>Anodized aluminum</i>
Diffuser type :	<i>Clear plexiglas (transparent)</i>
Fixation :	 <i>wall - ceiling - ground</i>
IP Protection degree :	<i>IP66</i>
Shock resistance degree :	<i>IK07</i>
Reference temperature :	<i>25°C</i>
Working Environment Temperature :	<i>-20°C > +50°C</i>
Minimum Life time @ Ta 40°C :	<i>85.000hrs (L80 B10)</i>
Weight (Kg) :	<i>0.50 Kg</i>
Dimensions mm (L x W x H):	<i>65 x 65 x 100 mm</i>
Country of origin :	<i>made in Belgium**</i>

Reference Standards and Directives

Warranty :	3 years extendable to 5
Product certification :	CE
Certification and approval marks :	ISO 9001 - 14001 - 45001

Available accessories

Led driver AC/CC from 200mA to 500mA
Led driver DC/CC (12-36VDC/200mA to 500mA)
Spike for ground fixing - Pic 4 ref: 804.04.02A
Anti-glare honeycomb - Louver ref: X060.050.3
IP68 connection - Connex 2 / 3 / 4

Lighting characteristics

Number of light sources :	1
Light source type :	Led 9,5W 3000K
Luminaire power :	9.5 W
Colour temperature :	3000 K
Colour Rendering Index :	CRI>90
Luminous flux (lumens) :	1035 lm
Luminous flux efficiency :	109 lm/W
MacAdam step :	3
Beam angle ° FWHM :	10°
Lighting type :	direct
This product contains a lightsource of energyclass :	F

Electrical characteristics

Insulation Class :	Class III
Voltage / Current :	500mA
Dimmable :	Yes

Available On Request

Other led color: 2200K / 5000K
Other cable length (customized)
Base for strap around a tree
Other anodized color

* Please refer to the information pages for the specific characteristics of anodized surfaces.

** All light fixtures shipped from our address in Megara, Greece are made in Greece.

BEL LIGHTING | Lena Pro-M-A

Item code: **7025A.30910.32D**

IK07

IP66

Class
III



Others photos
from the same range

