PARK LED HE

ROBUSTEZ LINEAR. DESEMPENHO FIÁVEL.

REFERÊNCIA | 101.3 / 101.4.ATL

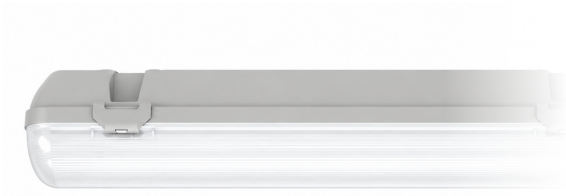

DETALHE DO CORPO E DIFUSOR

Imagem ilustrativa - detalhe parcial.

DADOS PRINCIPAIS

Construção	Corpo PC; difusor translúcido PC com proteção UV
Acabamento	RAL 7035
Fonte de luz	LED OSRAM integrado
Temperatura de cor	3000 K / 4000 K; 2700 K / 5000 K sob consulta
Qualidade de luz	CRI >80; consistência cromática 3 SDCM
Vida útil	60 000 h a Ta = 25 °C
Proteção	IP66 | IK08
Classe elétrica	Classe I
Montagem	Saliente, suspensa ou parede
Controlo	ON/OFF ou DALI; fluxo ajustável por corrente
Opção	Kit de emergência

DESCRIÇÃO

Luminária linear estanque para parques de estacionamento, armazéns, corredores, docas de carga, zonas de refrigeração e edifícios agrícolas. A construção em policarbonato combina resistência mecânica e proteção UV com uma distribuição luminosa uniforme.

DIMENSÕES

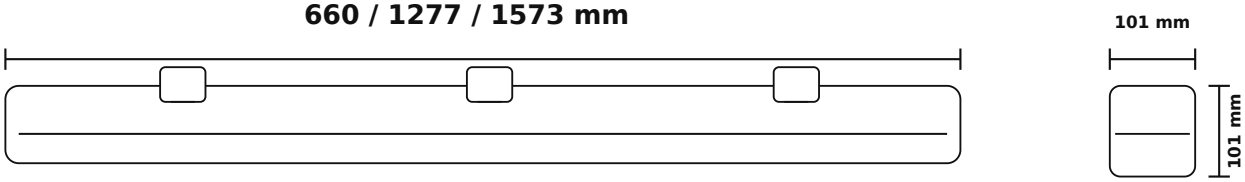

C x L x A = 660 / 1277 / 1573 x 101 x 101 mm

Desenho esquemático; cotas indicadas em milímetros.

VERSÕES E DESEMPENHO

VERSÃO	DIMENSÕES	POTÊNCIA	3000 K	4000 K	CONTROLO
S600	660 x 101 x 101 mm	13 W	1533 lm	1645 lm	ON/OFF | DALI
S1200	1277 x 101 x 101 mm	35 W	4433 lm	4656 lm	ON/OFF | DALI
S1500	1573 x 101 x 101 mm	42 W	5625 lm	5910 lm	ON/OFF | DALI

Referências: 101.3 = 3000 K; 101.4 = 4000 K. Sufixo D para DALI; sem D para ON/OFF.

NOTAS TÉCNICAS

Outras temperaturas de cor (2700 K / 5000 K) e fluxos luminosos disponíveis sob consulta. A possibilidade de controlo de corrente permite configurar fluxos adicionais. Potência e fluxo luminoso: tolerância +/-10%. Valores nominais a Ta = 25 °C, de acordo com EN 60598 e EN 13032-1. Confirmar opções de regulação e kit de emergência na referência.

Valores nominais; as imagens são ilustrativas. A LUZILED reserva-se o direito de alterar dados técnicos para melhoria do produto.

PARK LED HE

LINEAR ROBUSTNESS. RELIABLE PERFORMANCE.

PRODUCT FAMILY | 101.3 / 101.4.ATL

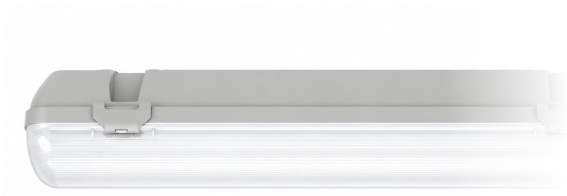

BODY AND DIFFUSER DETAIL

Illustrative image - partial detail.

KEY SPECIFICATIONS

Construction	Polycarbonate body; UV-protected translucent diffuser
Finish	RAL 7035
Light source	Integrated OSRAM LED
Colour temperature	3000 K / 4000 K; 2700 K / 5000 K on request
Light quality	CRI >80; 3 SDCM colour consistency
Rated lifetime	60,000 h at Ta = 25 °C
Protection	IP66 | IK08
Electrical class	Class I
Mounting	Surface, suspended or wall
Control	ON/OFF or DALI; current-controlled output options
Option	Emergency kit

DESCRIPTION

Sealed linear luminaire for car parks, warehouses, corridors, loading bays, cold rooms and agricultural buildings. Polycarbonate construction combines mechanical durability and UV protection with uniform light distribution.

DIMENSIONS

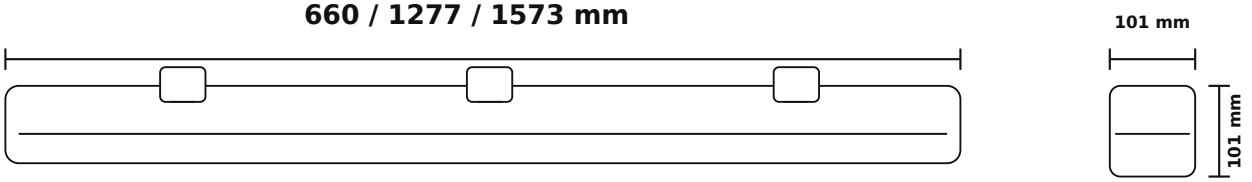

L x W x H = 660 / 1277 / 1573 x 101 x 101 mm

Schematic drawing; dimensions shown in millimetres.

VERSIONS AND PERFORMANCE

VERSION	DIMENSIONS	POWER	3000 K	4000 K	CONTROL
S600	660 x 101 x 101 mm	13 W	1533 lm	1645 lm	ON/OFF | DALI
S1200	1277 x 101 x 101 mm	35 W	4433 lm	4656 lm	ON/OFF | DALI
S1500	1573 x 101 x 101 mm	42 W	5625 lm	5910 lm	ON/OFF | DALI

Order codes: 101.3 = 3000 K; 101.4 = 4000 K. Suffix D for DALI; no suffix for ON/OFF.

TECHNICAL NOTES

Other colour temperatures (2700 K / 5000 K) and luminous outputs are available on request. Current control enables additional output configurations. Power and luminous flux tolerance: +/-10%. Nominal values at Ta = 25 °C, according to EN 60598 and EN 13032-1. Confirm dimming and emergency kit options against the order code.

Nominal values; images are illustrative. LUZILED reserves the right to revise technical data to improve the product.