




BEL LIGHTING | Hydro

Item code: **8062.D11.02**

IK09

IP65

Class
III

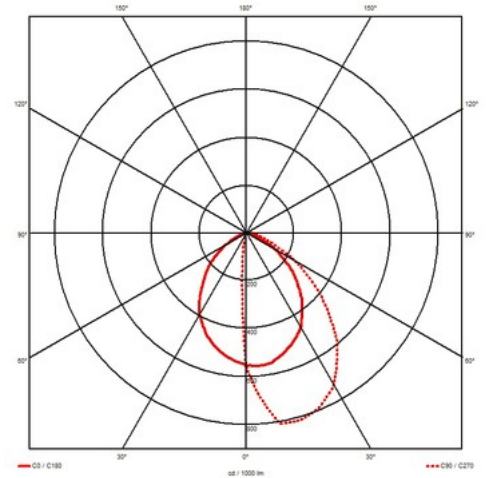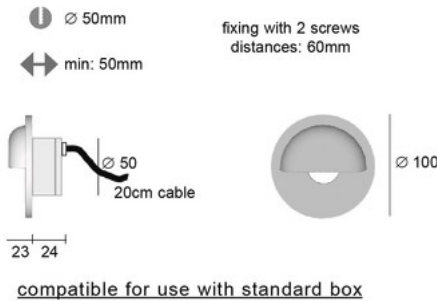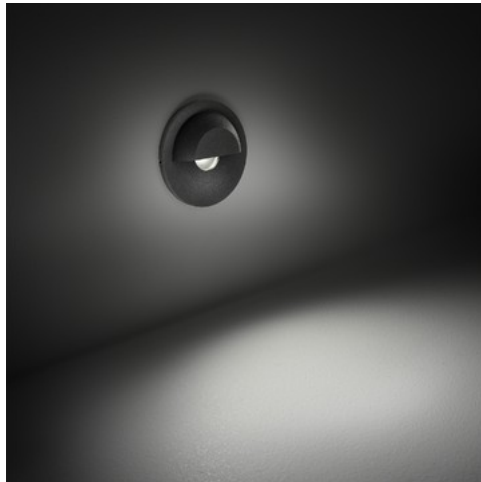

Product Description

Small round anti-glare recessed wall LED luminaire, made of aluminum. Fits discreetly into your wall to give a good atmosphere. This durable product impresses with its technical quality and finish. Installed by itself or in groups, this luminary is an attractive solution for many indoor and outdoor lighting applications.

General technical data

Manufacturing material :	Body made in aluminum
Surface finishing* :	Black
Diffuser type :	Satin white plexiglas
Fixation :	wall
IP Protection degree :	IP65
Shock resistance degree :	IK09
Reference temperature :	25°C
Working Environment Temperature :	-20°C > +50°C
Minimum Life time @ Ta 40°C :	85.000hrs (L80 B10)
Weight (Kg) :	0.30 Kg
Dimensions mm (L x W x H):	100 x 100 x 61 mm
Country of origin :	made in Belgium**

Reference Standards and Directives

Warranty :	3 years extendable to 5
Product certification :	CE
Certification and approval marks :	ISO 9001 - 14001 - 45001

Available accessories

To use with a standard box (depth minimum 50 mm)

Led driver AC/CC 350mA

Led driver DC/CC (12-36VDC/350mA)

Lighting characteristics

Number of light sources :	1
Light source type :	Led 1,1W 4000K
Luminaire power :	1.1 W
Colour temperature :	4000 K
Colour Rendering Index :	CRI>90
Luminous flux (lumens) :	135 lm
Luminous flux efficiency :	123 lm/W
MacAdam step :	3
Beam angle ° FWHM :	70°
Lighting type :	direct
This product contains a lightsource of energyclass :	D

Electrical characteristics

Insulation Class :	Class III
Voltage / Current :	350mA
Dimmable :	Yes

Available On Request

Other RAL colors

Other anodized color

Other material: brass / copper /...

Other led color: 3000K / 5000K

Only for led 3,2W 350mA: 2200K / 3000K / 5000K

* Please refer to the information pages for the specific characteristics of anodized surfaces.

** All light fixtures shipped from our address in Megara, Greece are made in Greece.

BEL LIGHTING | Hydro

Item code: **8062.D11.02**

IK09

IP65

Class
III



Others photos
from the same range

